

## RUGGED IU RACKMOUNT MONITOR & KEYBOARD DRAWER



Save valuable rack space with Daisy's new fold-down solution for controlling multiple servers from a single work station. This rugged 17.3" High-Definition LCD monitor housed in a NEMA 12 powder coated aluminum enclosure. Features a slide out, flip-up monitor drawer with integrated elastomeric keyboard, hula pointing device and KVMs in a single 1U high 19" rack.



### RATINGS

- Altitude (Non-Operating) MIL-STD-2036A  
15,000 Feet
- Shock & Vibration MIL-STD-810

### STANDARD FEATURES AND BENEFITS

- Designed to Fit into a Standard 19" Rack, 1U High
- 1920x1080 Resolution, 400 NIT
- Recessed Rear-Mount Receptacles
- VGA and DVI Video Inputs Standard
- Front Mounted OSD Controls
- Includes 120/240VAC Power Supply
- Designed to Withstand Shock and Vibration, High Humidity and Salt Fog
- Operating Temperature -20° C to 55° C
- Conformal Coated PC Boards
- 4-Port KVM Switch on the 2445AB Model

### OPTIONS AND ACCESSORIES

- Add Optional DisplayPort and/or HDMI Video Inputs

### ORDERING INFORMATION

**2445AA** Fold-Down Rack Mount Monitor 17.3"

**2445AB** Fold-Down Rack Mount Monitor 17.3"  
w/ 4-Port KVM Switch

# 2445 SERIES SPECIFICATIONS

## OPTIONS

**295** Adds Display Port Video Input

## MATERIALS

**Enclosure** Aluminum Black Powder Coated

**Viewpoint** Polycarbonate Standard

**Design** NEMA 12

**Weight** 21 lbs.

## ENVIRONMENTAL

**Operating Temperature** -20° to 55° C / -4° to 131° F

**Storage Temperature** -20° to 60° C / -4° to 140° F

**Relative Humidity** 0 to 100% Non-Condensing

## ELECTRICAL

**Voltage** 120/240 VAC,  
50/60 Hz

**Power** (Typical) 65W

## FLAT PANEL SPECIFICATIONS



**Maximum Resolution** 1920x1080

**Viewing Angle** (Typical H&V) 85°x85°

**Brightness** (Standard) 400 nits  
(Optional) 1000 nits

**Backlight** LED

**MTBF** 65,000 Hours

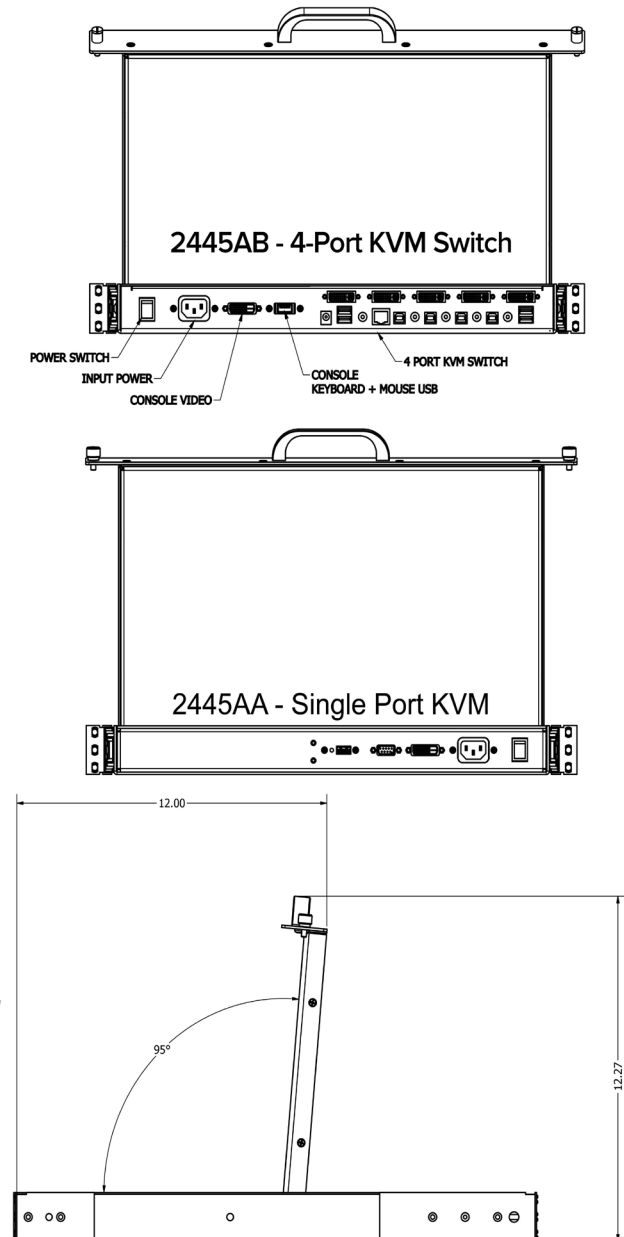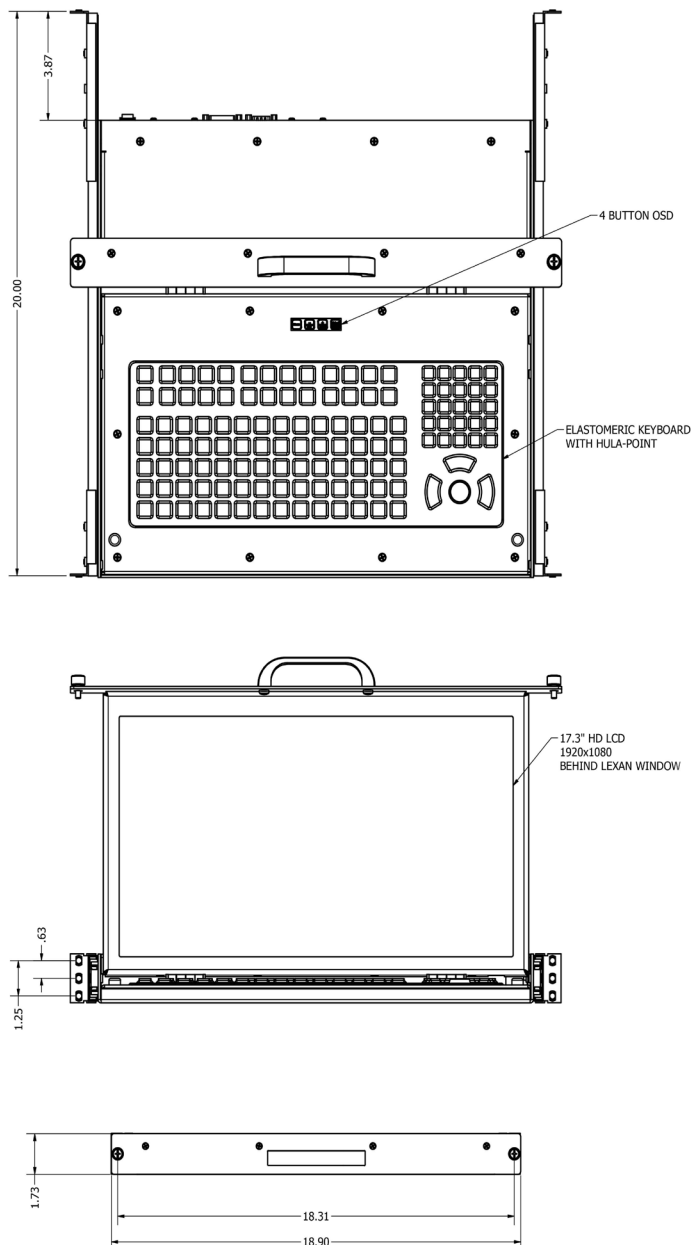

\* Specifications are subject to change without notice.